

SUPERCOM 7


FOR
32-BIT AND 64-BIT WINDOWS

© ADONTEC, 2010. All Rights Reserved.

www.adontec.com


Rel E 7016 - June 2010

SuperCom
Communication Software

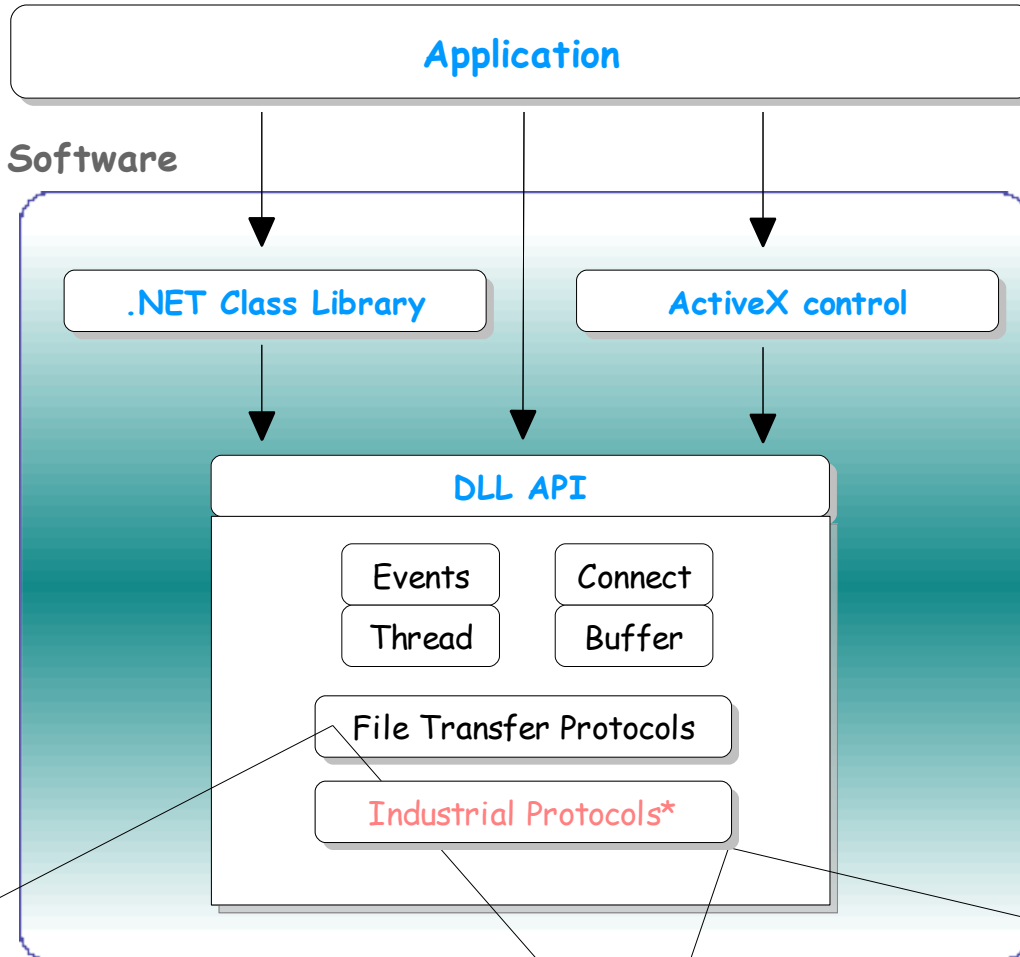


Use one API or combine the API's from a DUAL API SuperCom software package.


SuperCom offers the freedom to switch compiler anytime. You are not bound to one specific compiler only.

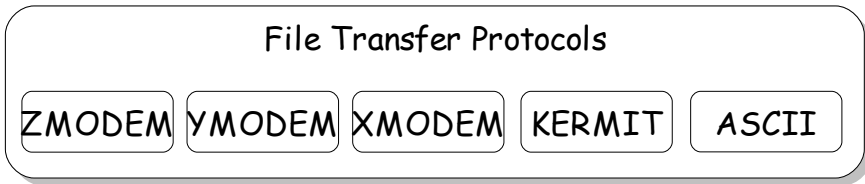

*where included


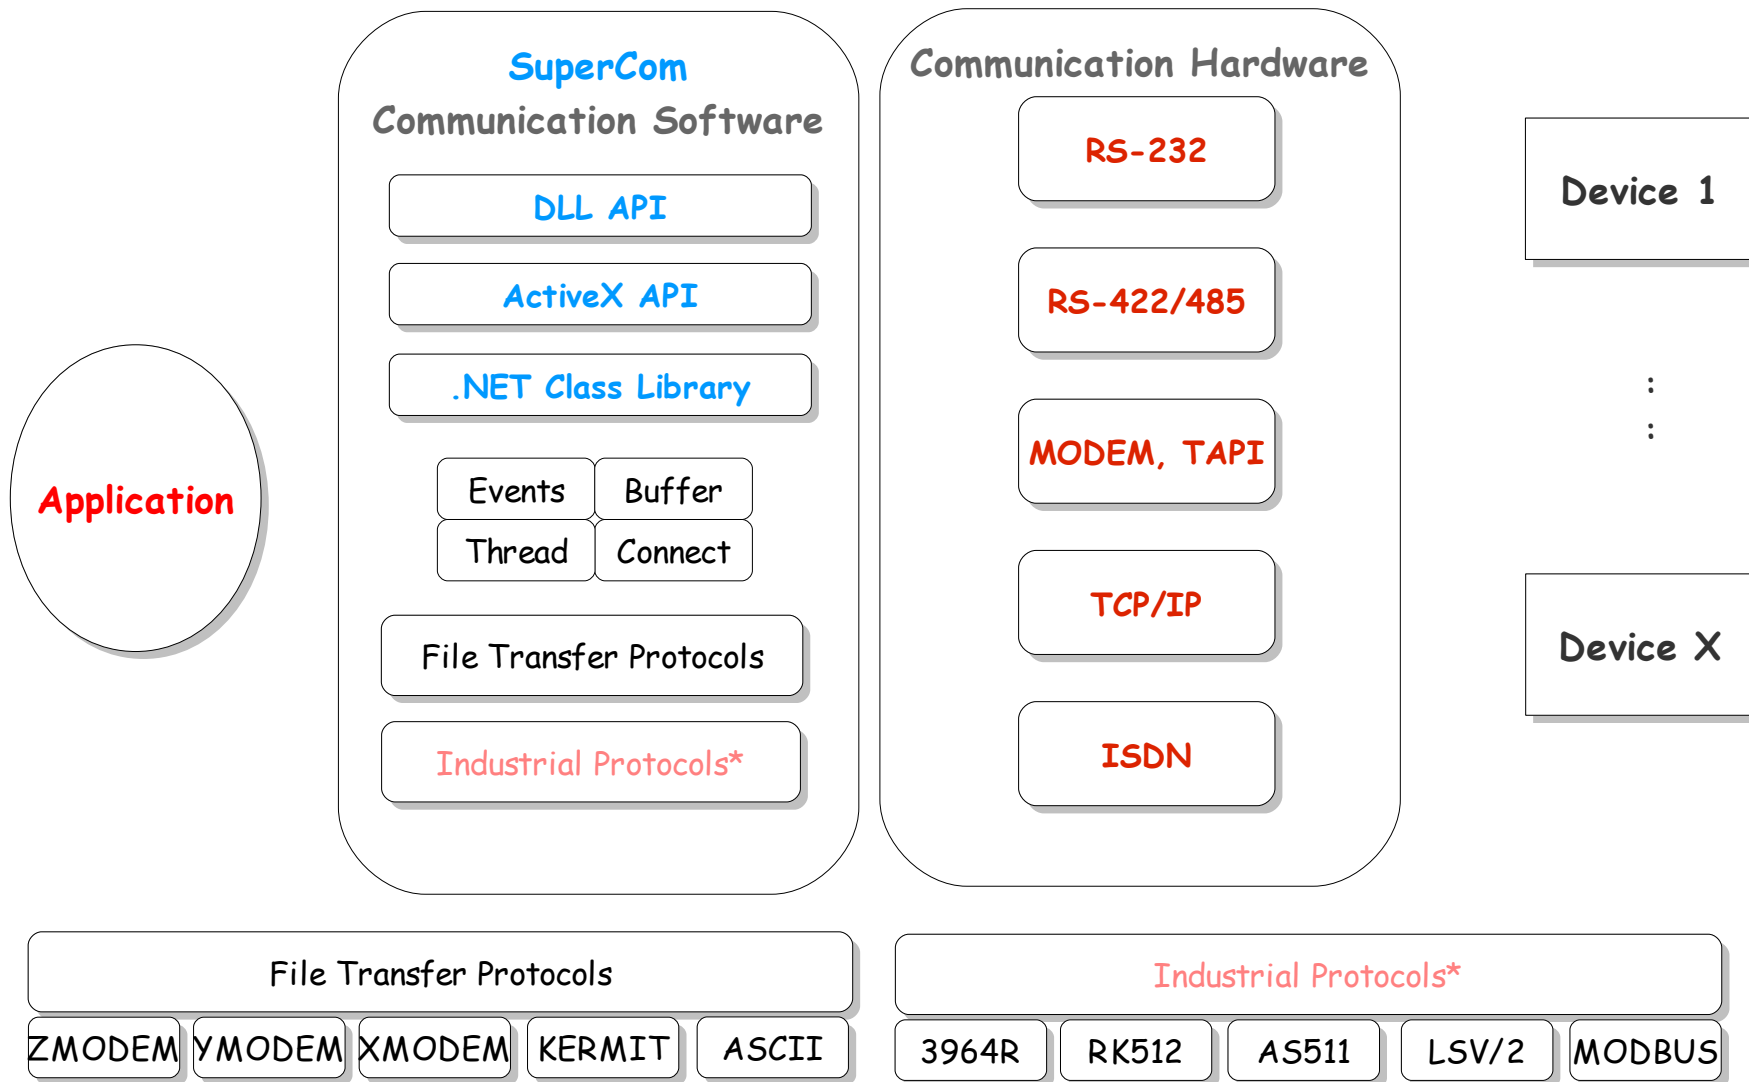


*where included

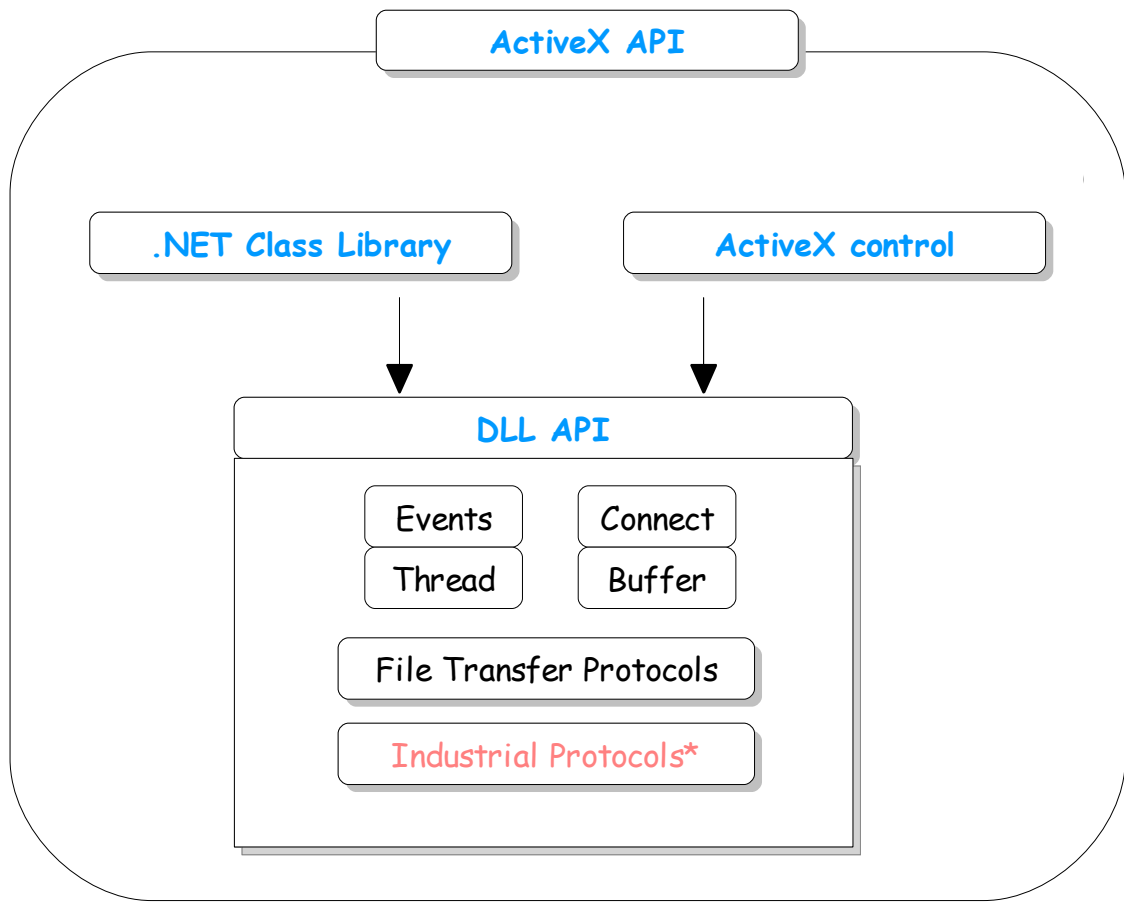

SuperCom supports many Development Environment. Many compiler supported and many samples provided for each Compiler.

Switch compiler anytime!

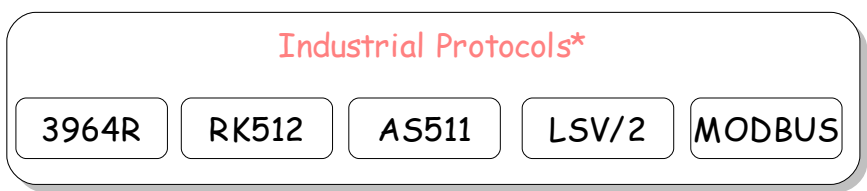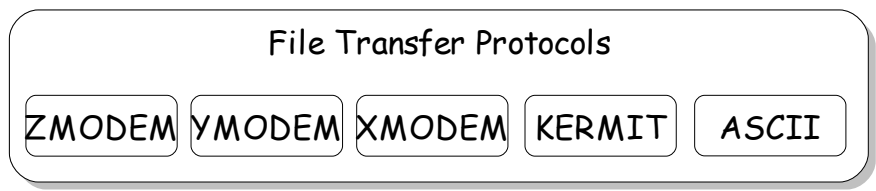

*where included

SuperCom supported communication hardware



Serial RS-232, RS-422/485:

Onboard COM1, COM2, serial ports on a multi-port card on a PCI, PCIe, PCI-X Card.

USB-to-Serial Converter. Ethernet-to-Serial Converter.

Virtual COM ports, Redirected ports, Bluetooth-to-serial, Infrared-to-serial.

MODEM, TAPI:

Hayes compatible Modem, TAPI-Modem, USB-Modem, GSM/GPRS-Modem

TCP/IP:

Client, Server with Windows TCP/IP protocol.

ISDN:

Internal CAPI cards or CAPI interface library.

Every application can control up to 255 connections simultaneously!

That can be 255 serial lines, Modem or ISDN connections, 255 TCP/IP clients or one TCP/IP server and up to 254 clients or up to 255 TCP/IP server or any other combination.

Connections can be mixed in any combination, as long the used connection type (ComType) is supported by the owned SuperCom package.

SuperCom 7 32-Bit for Windows

	Windows 3.x *	Windows 9x / Me	Windows 7 / Vista / XP / 200x / NT	ActiveX API	DLL API	RS-232/422/485	TAPI	ISDN	TCP/IP	YMODEM, XMODEM, ASCII	ZMODEM	KERMIT	.NET	SuperCom .NET Class Library	3964R / RK512 / AS511	LSV/2	MODBUS	Data Packet Collector	Data Trigger	Data Monitoring	Data Filter	Sharing Connections	Client / Server TCP/IP
626 - SuperCom Serial Library	✓	✓	✓	✓	✓	✓	✓			✓	✓	✓	✓	✓		2	2	✓	✓	✓	✓	✓	
627 - SuperCom Serial ActiveX		✓	✓	✓		✓	✓			✓	✓	✓	✓			2	2	✓	✓	3	3	✓	
616 - SuperCom ISDN Library		✓	✓	✓	✓			✓		✓	✓	✓	✓	✓		2	2	✓	✓	✓	✓		
615 - SuperCom TCP/IP Library		✓	✓	✓	✓				✓	✓	✓	✓	✓	✓		2	2	✓	✓	✓	✓	✓	✓
633 - SuperCom Suite		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		2	✓	✓	✓	✓	✓	✓	✓
620 - SuperCom 3964 Protocol Engine		✓	✓	✓	✓	✓	✓			✓	✓	✓	✓	✓	✓	2	✓	✓	✓	✓	✓	✓	
62111 - SuperCom Suite Industrial		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	2	✓	✓	✓	✓	✓	✓	✓
62612 - SuperCom Serial Library MODBUS	✓	✓	✓	✓	✓	✓	✓			✓	✓	✓	✓	✓		2	✓	✓	✓	✓	✓	✓	
61512 - SuperCom TCP/IP Library MODBUS		✓	✓	✓	✓				✓	✓	✓	✓	✓	✓		2	✓	✓	✓	✓	✓	✓	✓

- * On request cost free with the other Windows software
- 2 Optional
- 3 Only with a DUAL API license (ActiveX API + DLL API)

SuperCom 7 64-Bit for Windows x64

	Windows 7 / Vista / XP / 200x	ActiveX API	DLL API	RS-232/422/485	TAPI	ISDN	TCP/IP	YMODEM, XMODEM, ASCII	ZMODEM	KERMIT	.NET	SuperCom .NET Class Library	3964R / RK512 / AS511	LSV/2	MODBUS	Data Packet Collector	Data Trigger	Data Monitoring	Data Filter	Sharing Connections	Data Trigger	Data Monitoring	Data Filter	Sharing Connections	Client / Server TCP/IP
626400 - SuperCom x64 Serial Library	✓	✓	✓	✓	✓			✓	✓	✓	✓	✓		2	2	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
616400 - SuperCom x64 ISDN Library	✓	✓	✓			✓		✓	✓	✓	✓	✓		2	2	✓	✓	✓	✓	✓	✓	✓	✓		
615400 - SuperCom x64 TCP/IP Library	✓	✓	✓				✓	✓	✓	✓	✓	✓		2	2	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
633400 - SuperCom x64 Suite	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		2	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
620400 - SuperCom x64 3964 Protocol Engine	✓	✓	✓	✓	✓			✓	✓	✓	✓	✓	✓	2	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
621411 - SuperCom x64 Suite Industrial	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	2	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
626412 - SuperCom x64 Serial Library MODBUS	✓	✓	✓	✓	✓			✓	✓	✓	✓	✓		2	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
615412 - SuperCom x64 TCP/IP Library MODBUS	✓	✓	✓				✓	✓	✓	✓	✓	✓		2	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

* x64 = AMD 64 and Intel 64 Bit. IA-64 Optional

2 Optional

SuperCom 16/32-Bit DOS & OS/2

	DOS	OS/2	RS-232/422/485	YMODEM, XMODEM, ASCII	ZMODEM	KERMIT	3964R / RK512 / AS511	LSV/2	MODBUS
623 - SuperCom C/C++ for DOS	✓		✓	✓	✓	2	2	2	
623012 - SuperCom C/C++ for DOS – MODBUS	✓		✓	✓	✓	2	2	2	✓
6231 - SuperCom C/C++ for DOS/32	✓		✓	✓	✓	2	2	2	
623112 - SuperCom C/C++ for DOS/32 – MODBUS	✓		✓	✓	✓	2	2	2	✓
624 - SuperCom Pascal for DOS	✓		✓	✓	✓				
628 - SuperCom C/C++ for OS/2		✓	✓	✓	✓				

2 Optional

Pricelist *April 2010*

SuperCom 7 for Windows 32-Bit	USD
626 - SuperCom Serial Library	499
627 - SuperCom Serial ActiveX	390
616 - SuperCom ISDN Library	499
615 - SuperCom TCP/IP Library	499
633 - SuperCom Suite	999
620 - SuperCom 3964 Protocol Engine	999
62111 - SuperCom Suite Industrial	1850
62612 - SuperCom Serial Library MODBUS	599
61512 - SuperCom TCP/IP Library MODBUS	599
611 - SuperCom LSV/2 Protocol*	390

* If combined, for example with 626, 627, 616, 615.

SuperCom 7 for Windows 32-Bit and 64-Bit	USD
626301 - SuperCom Serial Library(x86/x64)	899
633433 - SuperCom Suite (x86/x64)	1790

SuperCom 7 for Windows 64-Bit (x64)	USD
626400 - SuperCom x64 Serial Library	599
616400 - SuperCom x64 ISDN Library	599
615400 - SuperCom x64 TCP/IP Library	599
633400 - SuperCom x64 Suite	1190
620400 - SuperCom x64 3964 Protocol Engine	1190
621411 - SuperCom x64 Suite Industrial	2190
626412 - SuperCom x64 Serial Library MODBUS	699
615412 - SuperCom x64 TCP/IP Library MODBUS	699
611400 - SuperCom x64 LSV/2 Protocol*	390

SuperCom 16/32-Bit DOS or OS/2	USD
623 - SuperCom C/C++ for DOS	375
623012 - SuperCom C/C++ for DOS – MODBUS	725
6231 - SuperCom C/C++ for DOS/32	495
623112 - SuperCom C/C++ for DOS/32-MODBUS	895
624 - SuperCom Pascal for DOS	375
628 - SuperCom C/C++ for OS/2	495

All prices listed excl. Sales Tax, VAT or Import duties. No shipping costs charged for internet download.

x86 = x86-32 (32-Bit, Intel /AMD compatible CPU)

x64 = x86-64 (64-Bit, AMD/Intel compatible CPU)

Notes

Serial = RS-232, RS-422, RS-485, serial analog Modem, TAPI.

TCP/IP = TCP/IP protocol under Windows.

ISDN = CAPI interface under Windows.

ActiveX API = One common API using the SuperCom ActiveX control or the SuperCom .NET Classes.

DLL API = One common API using SuperCom DLL modules or the SuperCom .NET Classes.

DUAL API = Are software packages that include support for ActiveX API and DLL API.

Standard protocols = ASCII, KERMIT, XMODEM, YMODEM, ZMODEM

XMODEM = XMODEM, XMODEM/CRC, XMODEM-1K, Extended XMODEM

Extended XMODEM = Extension to XMODEM (request file, up to 64K Buffer,
File-Information e.g. Name, Size, ...)



The protocol is based on the well known XMODEM. Developed by ADONTEC in 2002,
and is also backwards compatible. It was refined up to the first public release in 2010.

MODBUS = MODBUS/RTU, MODBUS/ASCII, Serial or TCP/IP.

Requirements

All 32-BIT packages support:

Operating system

Windows 95/98, Windows Me, Windows NT, Windows 2000, Windows 2000 Server, Windows 2003, Windows 2003 Server, Windows XP, Vista, Windows 2008 Server, Windows 7.

Compiler

Visual Studio 6, Visual Studio 2005, Visual Studio 2008, Visual Studio 2010, Visual Basic, VBA, C#, Visual C++, C++ Builder, Delphi, FoxPro, LabView, MinGW and other.

All 64-BIT (x64) packages support:

Operating system

the x64 variants of Windows for example Windows 2003 Server, Windows XP, Vista, Windows 2008 Server, Windows 7.

Compiler

Visual Studio 2005, Visual Studio 2008, Visual Studio 2010.
